


iMin Swan 1 Pro Desktop POS

Our award winning iMin Swan 1 just got upgraded - with a processing performance of up to four times faster, sharper graphics, increased memory and AI computing to help you serve your customers faster and better.



**Product Design
2023**

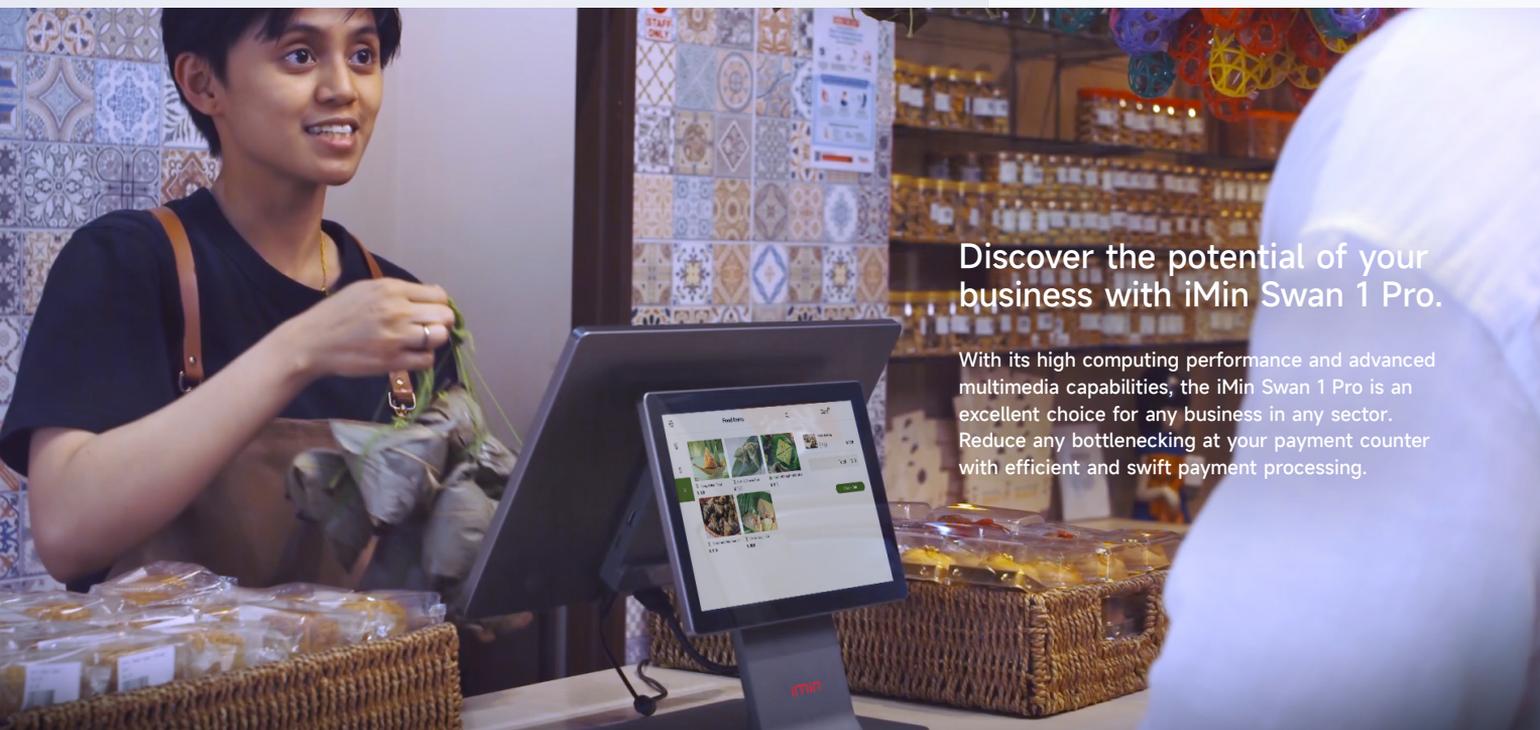

Discover the potential of your business with iMin Swan 1 Pro.

With its high computing performance and advanced multimedia capabilities, the iMin Swan 1 Pro is an excellent choice for any business in any sector. Reduce any bottlenecking at your payment counter with efficient and swift payment processing.

Secure your next sale with iMin Swan 1 Pro.

Facilitate a unique and smooth checkout experience for your customers.



Display

15.6" main IPS display with thin bezel design and 170 degree viewing angle for quality graphics with a full metal finish.




Various Forms

Detachable Dual-screen display option that provides many possibilities for your business.




More capabilities


Built-in NFC module on secondary display to provide a seamless payment process.

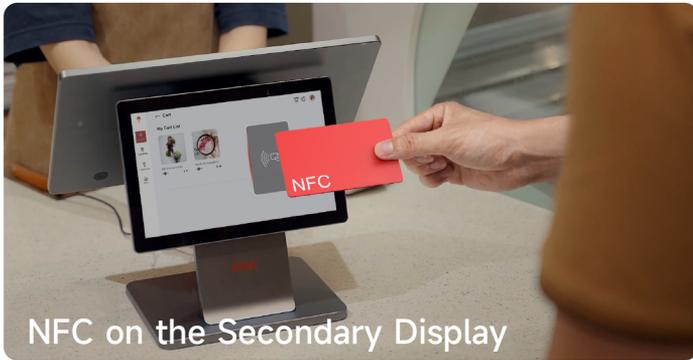

NFC on the Secondary Display

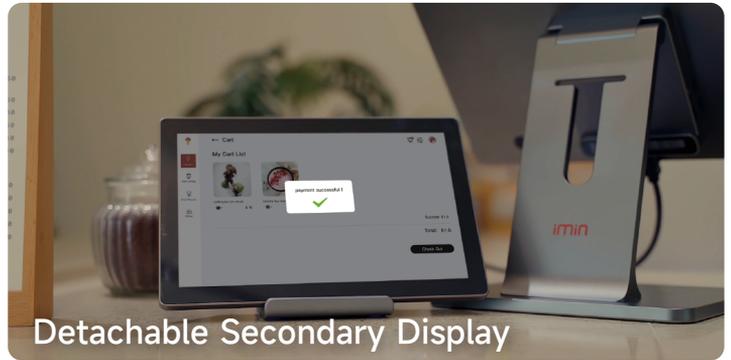

Detachable Secondary Display

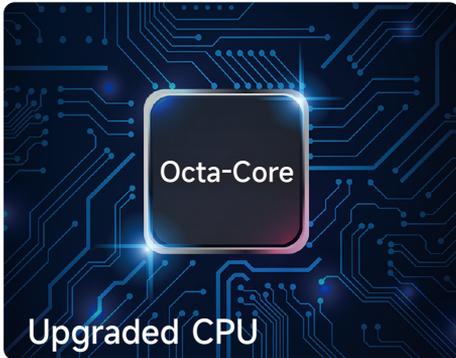

Specification

| | | | |
|---------------|---|------------------|--|
| Display | Main Display: 15.6" 1920 x 1080 Secondary Display: 10.1" 1280 x 800 | Memory | 4GB RAM + 64GB ROM 8GB RAM + 128GB ROM |
| Processor | Octa-Core (Dual-Core Arm Cortex-A78 2.2GHz, Hexa-Core Arm Cortex-A55 2.0GHz) | Operating System | Android 13 series iMin UI |
| Power Adapter | Input: 100 ~ 240V, Output: 24V / 1.5A | Speaker | 1.5W Mono |
| Connectivity | Ethernet: 1000M, Bluetooth 5.2 Wi-Fi: 802.11 a/b/g/n/ac/ax (2.4GHz/5GHz) | TF Card | Up to 128G |
| Touch Panel | 10 Point Capacitive Touch Panel ; Secondary Display (Sold Separately) : Multi-point Capacitive Touch Panel (Optional) NFC (Optional) | Peripheral Ports | Type_A 2.0 x 2, Type_A 3.0 x 1, RJ12 x 1, RJ11 x 1, RJ45 x 1, DC Jack x 1, TF Card x 1, Port to Connect Secondary Display |
| Environment | Operating temperature: 0 ~ 40°C Storage temperature: -20 ~ 60°C | Certification | FCC CE IMDA WEEE |
| Dimensions | 363.8 x 185 x 300mm | Weight | Dual Display: 3.23Kg Single Display: 2.65Kg |

* The product pictures and display contents in the above pages are for illustration purposes only. The actual product effects (including but not limited to appearance, color, size) and screen display contents (including but not limited to background UI pictures) might differ.

The performance results are obtained from iMin's internal laboratory and extracted from specific test environments. In actual use, there might be a difference in performance due to individual differences in product, software, use conditions and environmental factors.

The secondary display and accessories (display cable extension) are sold separately according to user needs.

Powered by  **vivawallet**